


AirTek

FRAS Air and Water Delivery Hose

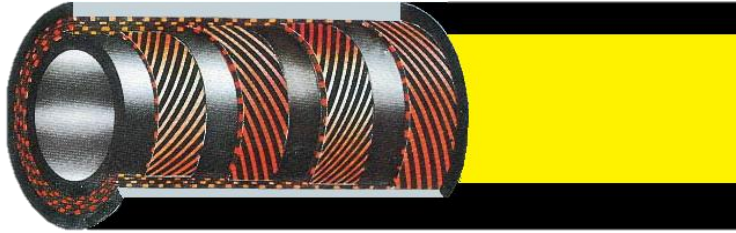

Size	Outside Diameter	Working Pressure	Burst Pressure	Bend Radius	Weight
mm	mm	Bar	Bar	mm	Kg/m
12	25	25	100	100	0.48
19	31	25	100	150	0.61
25	37	25	100	205	0.74

Robust air and water delivery hose, flame resistant and antistatic properties in accordance with AS 2660 and performance requirements of AS 2554 Class AA

Applications: Water and air delivery in mine sites, oil platforms, gas plants, and where high performance hose is required.

Temp Range: -15°C / +80°C

Tube: Black FRAS rubber

Reinforcing Multiple plies of textile reinforcement

Cover Black, abrasion resistant synthetic rubber, FRAS

Lay line:

Twin yellow transfers, 1 plain yellow and 1 with negative (black) text. Spiralled around hose
Text example:

AirTek

AS 2554 AA / AS 2660 A

FRAS Air/Water Delivery Hose

25 Bar
360 psi
2500kPa

SF
4:1

-15°C + 80°C
5°F +175°F

Standards: Meets or exceeds requirements of AS 2660 Class A hose, Flame resistant Antistatic (FRAS), and performance requirements of AS 2554 Class AA