


20 Bar FRAS R4 Hose

Flame resistant, anti-static hose exceeding SAE 100R4

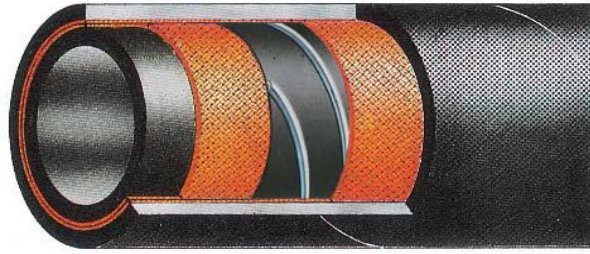

ID			OD		Max W.P.		Burst Pressure		Vacuum	Bend Radius	Weight
Dash	Inch	DN	mm	bar	psi	bar	psi	bar	mm	kg/m	
32	2	51	67 (+/- 1.2mm)	20	290	80	1160	-0.9	250	2.25	

APPLICATIONS:

A flame resistant and antistatic hose for the suction and discharge of oil and hydraulic fluids

SERVICE TEMPERATURE RANGE:

Suitable for use in the range -40°C to + 100 °C

TUBE:

Hydraulic oil resistant, special NBR conductive rubber.

REINFORCEMENT:

High tensile synthetic textile fabrics, and steel wire helix embedded between the layers.

COVER:

Oil, ozone, abrasion and weather resistant black neoprene rubber.

STANDARDS:

AS 3791 / SAE 100R4

FRAS to AS 2660 requirements

HDS Hoses Australia

Midvale, Western Australia

Tel: +61 89274 0020 Fax: +61 89274 6134

admin@HDS-Hoses.com

www.HDS-Hoses.com



Certificate No.: 73Q14710

HDS 20 Bar FRAS R4