






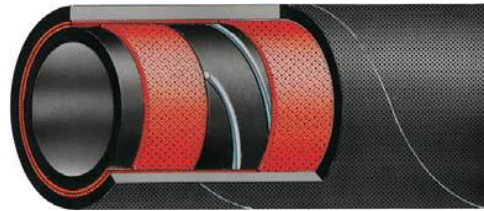


HDS R4-X Extra Flex

SAE 100R4 HOSE, EXTRA FLEXIBLE DESIGN



						
ID	OD	Max W.P.	Burst Pressure	VACCUM	Bend Radius	Weight

Dash	Inch	DN	mm	bar	psi	bar	psi	bar	mm	kg/m
12	3/4	19	29	21	305	84	1218	-0.8	40	0.522
16	1	25	35	17	247	68	986	-0.8	45	0.638
20	1 1/4	32	42	14	203	56	812	-0.8	60	0.825
24	1 1/2	38	49	10	145	40	580	-0.8	65	1.075
28	1 3/4	44	56	10	145	40	580	-0.8	90	1.369
32	2	51	62	7	102	28	406	-0.8	100	1.544
40	2 1/2	63	75.5	4	58	16	232	-0.8	140	2.018
48	3	76	88	4	58	16	232	-0.8	180	2.505
56	3 1/2	89	103	3	44	12	174	-0.8	215	3.162
64	4	104	115	2	29	8	116	-0.8	260	3.635

APPLICATIONS:

Low pressure hydraulic oil lines, return lines and suction applications.

SERVICE TEMPERATURE RANGE:

-40 to +100° C

TUBE:

OIL RESISTANT NBR RUBBER

REINFORCEMENT:

HIGH TENSILE SYNTHETIC TEXTILE FIBER AND STEEL WIRE HELIX

COVER:

OIL,HEAT,ABRASION,OZONE AND WEATHER RESISTANT SPECIAL CR RUBBER

STANDARDS:

SAE100R4 - AS 3791 100R4

HDS Hoses Australia

Midvale, Western Australia

Tel: +61 89274 0020 Fax: +61 89274 6134

admin@HDS-Hoses.com

www.HDS-Hoses.com



Certificate No.: 73Q14710

HDS R4-X V1.0