


HDS BF20SD-A

Premium 20bar oil suction and delivery hose, high tensile strength

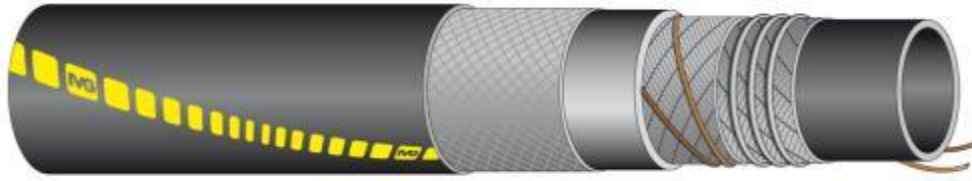

ID	OD	Max W.P.	Burst Pressure	Vacuum	Bend Radius	Weight

Inch	DN	mm	bar	psi	bar	psi	bar	mm	kg/m
4	100	123	20	300	80	1200	-0.9	550	6.2

APPLICATIONS:

Designed for offshore fuel bunkering, this hose is also used for glycol transfer, mud mixed with oil, ship to rig, ship to ship on doc, suction and delivery hose for filling and discharging tanks, petrol tankers, and various other applications that require a hard wearing suction and delivery hose.

Suitable for liquids with up to 50% Aromatic Content

SERVICE TEMPERATURE RANGE:

-40°C to + 90°C

TUBE:

Black, smooth, PVC/NBR rubber

REINFORCEMENT:

High strength synthetic cord, steel helix wire, and antistatic copper wire.

COVER:

Black, smooth (wrapped finished), flame retardant CR rubber. Resistant to weathering, abrasion, oil and sea water.

STANDARDS:

Hose designed in accordance with BS EN 1765:2004 with the exclusion of Paragraphs 4, 5.2, 7 and 10

Confirmed tensile breaking load of 7000 kgf

4" hose available in lengths up to 120m. Other sizes and working pressure available.

HDS Hoses Australia

Midvale, Western Australia

Tel: +61 89274 0020 Fax: +61 89274 6134

admin@HDS-Hoses.com

www.HDS-Hoses.com



Certificate No.: 73Q14710