


HDS L46

4 WIRE, ABRASION RESISTANT, HIGH PRESSURE HOSE

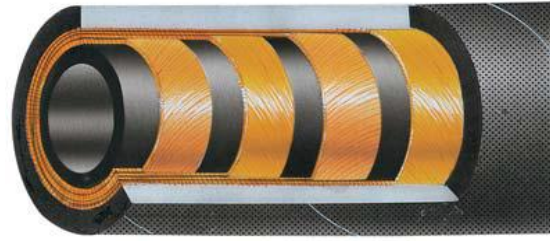

					
ID	OD	Max W.P.	Burst Pressure	Bend Radius	Weight

Dash	Inch	DN	mm	bar	psi	bar	psi	mm	kg/m
12	3/4	20	32	475	6888	1900	27550	280	1.5
16	1	25	38.2	460	6670	1850	26825	340	2.1
20	1 1/4"	32	49.2	450	6525	1800	26100	420	3.4
24	1 1/2"	40	57	350	5075	1400	20300	550	4.1
32	2	50	70.3	275	3988	1100	15950	700	5.4

APPLICATIONS:

Heavy duty high pressure hydraulic line where superior abrasion resistance is required

SERVICE TEMPERATURE RANGE:

-40 to +120 degrees Celsius

TUBE:

Synthetic oil resistant rubber

REINFORCEMENT:

4 wire spiral

COVER:

Abrasion, UV and ozone resistant synthetic rubber

STANDARDS:

3/4" and 1" Exceed EN 856 4SH

ADDITIONAL FEATURES:

Tested to 2,000,000 impulse cycles according to ISO6802 under rotating installation conditions.

HDS Hoses Australia

Midvale, Western Australia

Tel: +61 89274 0020 Fax: +61 89274 6134

admin@HDS-Hoses.com

www.HDS-Hoses.com



Certificate No.: 63Q14710