





# HDS L4

4 WIRE, ABRASION RESISTANT, HIGH PRESSURE HOSE

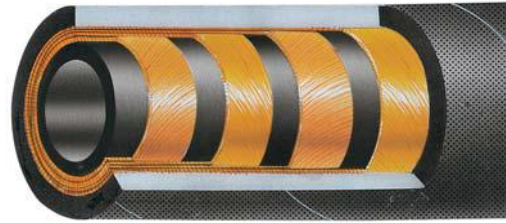

					
<b>ID</b>	<b>OD</b>	<b>Max W.P.</b>	<b>Burst Pressure</b>	<b>Bend Radius</b>	<b>Weight</b>

Dash	Inch	DN	mm	bar	psi	bar	psi	mm	kg/m
4	1/4	6	17.8	670	9715	2680	38860	150	0.6
6	3/8	10	20.5	525	7613	2100	30450	180	0.7
8	1	12	24	480	6960	1920	27840	230	0.8
10	5/8	16	27	410	5945	1640	23780	250	1

## APPLICATIONS:

Heavy duty high pressure hydraulic line where superior abrasion resistance is required

## SERVICE TEMPERATURE RANGE:

-40 to +120 degrees Celsius

## TUBE:

Synthetic oil resistant rubber

## REINFORCEMENT:

4 wire spiral

## COVER:

Abrasion, UV and ozone resistant synthetic rubber

## STANDARDS:

Exceed EN 856 4SP

## ADDITIONAL FEATURES:

Tested to 2,000,000 impulse cycles according to ISO6802 under rotating installation conditions.

## HDS Hoses Australia

Midvale, Western Australia

Tel: +61 89274 0020 Fax: +61 89274 6134

[admin@HDS-Hoses.com](mailto:admin@HDS-Hoses.com)

[www.HDS-Hoses.com](http://www.HDS-Hoses.com)



Certificate No.: 63Q14710