


# HDS L6

6 WIRE, ABRASION RESISTANT, HIGH PRESSURE HOSE

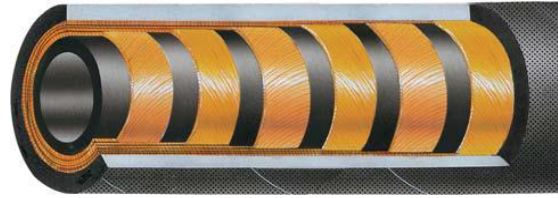

<b>ID</b>	<b>OD</b>	<b>Max W.P.</b>	<b>Burst Pressure</b>	<b>Bend Radius</b>	<b>Weight</b>

Dash	Inch	DN	mm	bar	psi	bar	psi	mm	kg/m
20	1 1/4	32	52	525	7613	2100	30450	460	4.4
24	1 1/2	38	59	500	7250	2000	29000	550	5.3
32	2	50	72.6	430	6235	1720	24940	640	7
40	2 1/2	65	87.5	360	5220	1440	20880	800	7.9
48	3	75	94	220	3190	880	12760	900	9.6

#### APPLICATIONS:

Heavy duty high pressure hydraulic line where superior abrasion resistance is required

#### SERVICE TEMPERATURE RANGE:

-40 to +120 degrees Celsius

#### TUBE:

Synthetic oil resistant rubber

#### REINFORCEMENT:

6 wire spiral

#### COVER:

Abrasion, UV and ozone resistant synthetic rubber

#### STANDARDS:

Exceeds SAE 100R15

#### ADDITIONAL FEATURES:

Tested to 2,000,000 impulse cycles according to ISO6802 under rotating installation conditions.

## HDS Hoses Australia

Midvale, Western Australia

Tel: +61 89274 0020 Fax: +61 89274 6134

[admin@HDS-Hoses.com](mailto:admin@HDS-Hoses.com)

[www.HDS-Hoses.com](http://www.HDS-Hoses.com)



Certificate No.: 63Q14710